Teensy® LC Back Side

Additional pins, features, and specifications

25 A11
24 A10
AREF

DAC/A12/26
Program
GND
3.3V

8mA 17
Vin Voltage
Output Only

Cut to separate VIN from VUSB, if using a battery charger or external power.

USB Signals

CAUTION:
Teensy-LC pins are not 5 volt tolerant. Do not apply more than 3.3V.
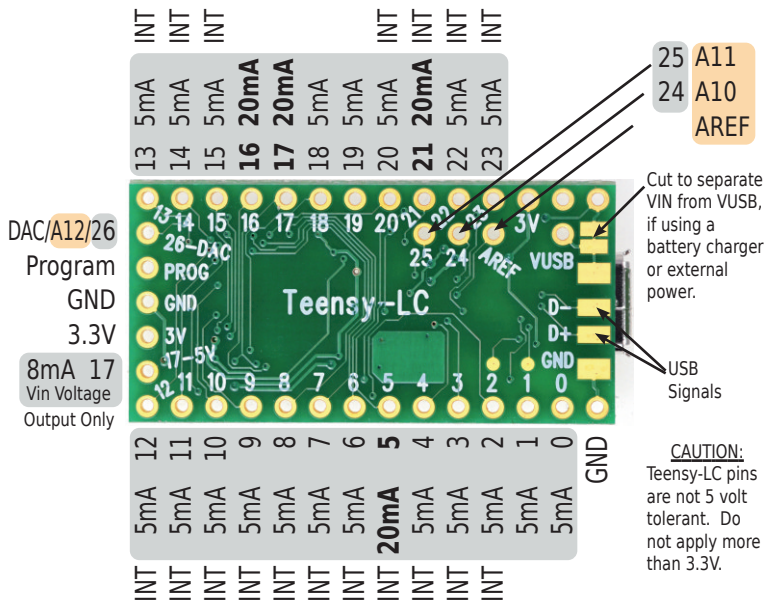
For solutions to the most common issues and technical support, please visit:

www.pjrc.com/help

7 14833 87956 5